


PANEL SECURITY GATE (HF)

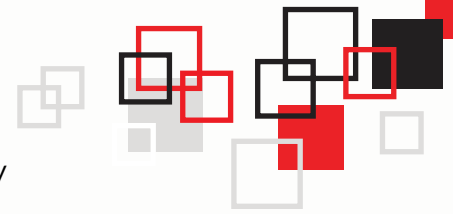

Arcus Panel Security Portals are an attractive HF security solution. They can be daisy chained up to 9 lanes (10 panels) with each opening width up to 1.4m providing excellent 3D read rates.

Gates are durable and designed for the library market. The transparent acrylic plate illuminates red with a audible alarm when an item activates security. Gates can be installed free standing or bolted to the floor with channeled cabling.

These gates are compatible with security on tag (EAS) or when using the Arcus Edge database web service Arcus will determine if RFID tags should alarm the gate. This innovative approach improves performance, speed, and facilitates the use of mobile devices or barcode to checkout items from the library.

The Arcus security interface is browser based providing access from anywhere with an internet connection including PCs or phones/tablets.

All Adilam Security solutions come with our cloud Arcus Flow vision based people counting solution.





Technical Specifications

Dimensions	Panel—557 (width) x 120 (depth) x 1660 (height) mm Base—629 (width) x 120 (depth)mm x 16mm (height)	RFID Frequency	13.56 MHz
Weight	40 kg (per panel)	Protocol	ISO 15693, ISO 28560, and other formats
Supply Voltage	100-240V AC (national plug type to be specified on ordering)	Read Range	Approx. 0.7m
Connectivity	Ethernet (TCP/IP)	People Counter	Supplied with our cloud Arcus Flow Vision based people counter
Alarm	Integrated sound and light alarm	Configuration	Panel separation up to 1.4m, up to 10 panels

ARCUS IS INTERACTIVE SECURITY



 Adilam

ADILAM PTY LTD

 14 Nicole Close
Bayswater North
Vic 3153 Australia
 +61 3 9761 6922

 www.adilam.com.au

ADILAM PTE LIMITED

 22 New Industrial Road
#07-17 Primax Building
Singapore 536208
 +65 6513 1203

 www.adilam.com.sg

 arcus